


Spring Plungers FSTI

Stroke from 10 mm to 50 mm



Spring Plungers FSTI

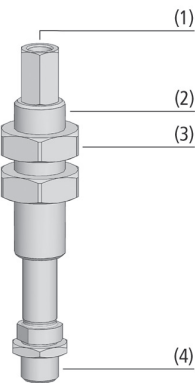

System Design Spring Plungers FSTI



Mounting example Spring Plungers FSTI

Suitability for Industry Specific Applications

Applications

- Spring plunger with internal damping spring for handling of workpieces with differing heights, such as curved metal sheets, etc.
- Handling of sensitive workpieces (such as sheets of glass) without additional control functions to prevent damage, since the plunger ensures soft placement
- Particularly suitable for handling tasks in the automotive sector

Design

- Spring plunger consisting of high strength steel rod, guide sleeve with integrated sliding bearing (2) and internal damping spring
- Connection thread for suction cup male (4); connection thread for vacuum supply (1) either female or male
- Two lock nuts (3) for attachment
- Burnished surface; on the version with anti-rotation function, the plunger rod is coated for optimum sliding behaviour
- Plunger rod with integrated vacuum feed
- Anti-rotation guard due to flat side on the rod and a correspondingly shaped guide sleeve

Our Highlights...

- Spring plunger with high quality sliding bearings and excellent guidance
- Internal damping spring
- Minimum overall height; weight optimized
- Available with anti-rotation guard

Your Benefits...

- Very economical operation, since no maintenance needed
- Soft placement on easily damaged workpieces; spring protected against dirt and external mechanical forces
- Suitable for use in very small spaces and with highly dynamic motion
- Suitable for use with oval suction cups

Schmalz – The Company

Vacuum Suction Cups

Special Grippers

Gripping Systems

Clamping Systems

Mounting Elements

Vacuum Generators

Valve Technology

Switches and Monitoring

Filters and Connections

Services

Contact

Glossary

Index of Products



Spring Plungers FSTI

Stroke from 10 mm to 50 mm



Designation Code Spring Plungers FSTI

FSTI	-	G1/4-AG	-	G1/8-AG	-	10	-	VG
1		2		3		4		5

1 – Abbreviated designation

Code	Version
FSTI	FSTI

2 – Suction cup connection

Code	Connection
G1/4-AG	G1/4-AG (AG = male (M))
G3/8-AG	G3/8-AG

3 – Vacuum connection

Code	Connection
G1/8-AG	G1/8-AG (AG = male (M))
G1/8-IG	G1/8-IG (IG = female (F))

4 – Plunger stroke

Code	Plunger stroke in mm
10...50	10 to 50

5 – Product addition

Code	Type
VG	With anti-rotation guard

The spring plunger FSTI is delivered as a ready-to-connect product.



Ordering Data Spring Plungers FSTI

Type*				Plunger stroke in mm: **		
				10	25	50
FSTI	G1/4-AG	G1/8-AG	-	10.01.02.00864	10.01.02.00868	10.01.02.00992
FSTI	G1/4-AG	G1/8-AG	VG	10.01.02.00865	10.01.02.00869	10.01.02.00993
FSTI	G1/4-AG	G1/8-IG	-	10.01.02.00866	10.01.02.00870	10.01.02.00994
FSTI	G1/4-AG	G1/8-IG	VG	10.01.02.00867	10.01.02.00871	10.01.02.00995
FSTI	G3/8-AG	G1/8-AG	-	10.01.02.00755	10.01.02.00843	10.01.02.00996
FSTI	G3/8-AG	G1/8-AG	VG	10.01.02.00860	10.01.02.00862	10.01.02.00997
FSTI	G3/8-AG	G1/8-IG	-	10.01.02.00851	10.01.02.00850	10.01.02.00998
FSTI	G3/8-AG	G1/8-IG	VG	10.01.02.00861	10.01.02.00863	10.01.02.00999

*VG = Version with anti-rotation guard for repeatably accurate positioning of suction cups

**Recommendation: To raise the lifetime in continuous operation, prevent the maximal slide stroke



Technical Data Spring Plungers FSTI

Type	Spring rate [N/mm]	Spring pretension [N/mm]	Spring force, center [N]*	Vertical load [N]**	Horizontal load [N]***	Weight [g]	Operating temperature [°C]
FSTI G1/4-AG G1/8-AG 10	0.097	7.08	7.57	1,000	700	150	0 ... 80
FSTI G1/4-AG G1/8-AG 10 VG	0.097	7.08	7.57	1,000	500	150	0 ... 80
FSTI G1/4-AG G1/8-IG 10	0.097	7.08	7.57	1,000	700	150	0 ... 80
FSTI G1/4-AG G1/8-IG 10 VG	0.097	7.08	7.57	1,000	500	150	0 ... 80
FSTI G1/4-AG G1/8-AG 25	0.097	5.63	6.84	1,000	700	180	0 ... 80
FSTI G1/4-AG G1/8-AG 25 VG	0.097	5.63	6.84	1,000	500	180	0 ... 80
FSTI G1/4-AG G1/8-IG 25	0.097	5.63	6.84	1,000	700	180	0 ... 80
FSTI G1/4-AG G1/8-IG 25 VG	0.097	5.63	6.84	1,000	500	180	0 ... 80
FSTI G1/4-AG G1/8-AG 50	0.097	2.30	4.70	1,000	700	230	0 ... 80
FSTI G1/4-AG G1/8-AG 50 VG	0.097	2.30	4.70	1,000	500	230	0 ... 80
FSTI G1/4-AG G1/8-IG 50	0.097	2.30	4.70	1,000	700	230	0 ... 80
FSTI G1/4-AG G1/8-IG 50 VG	0.097	2.30	4.70	1,000	500	230	0 ... 80
FSTI G3/8-AG G1/8-AG 10	0.097	7.08	7.57	1,000	700	150	0 ... 80
FSTI G3/8-AG G1/8-AG 10 VG	0.097	7.08	7.57	1,000	500	150	0 ... 80



Stroke from 10 mm to 50 mm



Technical Data Spring Plungers FSTI

Type	Spring rate [N/mm]	Spring pretension [N/mm]	Spring force, center [N]*	Vertical load [N]**	Horizontal load [N]***	Weight [g]	Operating temperature [°C]
FSTI G3/8-AG G1/8-IG 10	0.097	7.08	7.57	1,000	700	150	0 ... 80
FSTI G3/8-AG G1/8-IG 10 VG	0.097	7.08	7.57	1,000	500	150	0 ... 80
FSTI G3/8-AG G1/8-AG 25	0.097	5.63	6.84	1,000	700	180	0 ... 80
FSTI G3/8-AG G1/8-AG 25 VG	0.097	5.63	6.84	1,000	500	180	0 ... 80
FSTI G3/8-AG G1/8-IG 25	0.097	5.63	6.84	1,000	700	180	0 ... 80
FSTI G3/8-AG G1/8-IG 25 VG	0.097	5.63	6.84	1,000	500	180	0 ... 80
FSTI G3/8-AG G1/8-IG 50	0.097	2.30	4.70	1,000	700	230	0 ... 80
FSTI G3/8-AG G1/8-IG 50 VG	0.097	2.30	4.70	1,000	500	230	0 ... 80
FSTI G3/8-AG G1/8-AG 50	0.097	2.30	4.70	1,000	700	230	0 ... 80
FSTI G3/8-AG G1/8-AG 50 VG	0.097	2.30	4.70	1,000	500	230	0 ... 80


*Referred to 50 % of operating stroke

**Maximum static loading


***The specification of the horizontal load refers to the lower edge of the plunger with extended spring. It is a maximum static stress and it impairs the spring compression and extension in horizontal position.



Design Data Spring Plungers FSTI

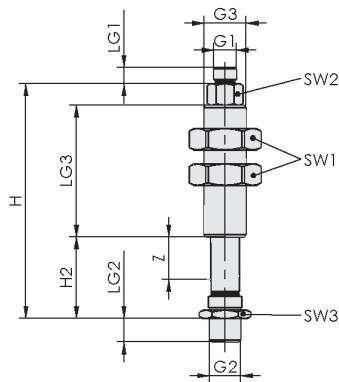

FSTI AG/AG (VG)

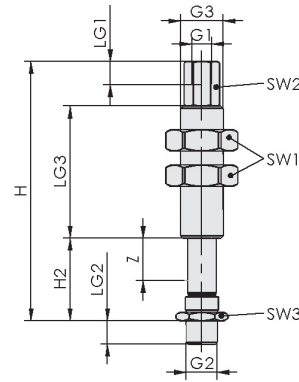

FSTI AG/IG (VG)

Type	G1	G2	G3	H [mm]	H2 [mm]	LG1 [mm]	LG2 [mm]	LG3 [mm]	SW1 [mm]	SW2 [mm]	SW3 [mm]	Z (Stroke) [mm]
FSTI G1/4-AG G1/8-AG 10	G1/8"-M	G1/4"-M	M18x1.5-M	71.0	21.0	6.5	10	41	27	13	17	10
FSTI G1/4-AG G1/8-AG 10 VG	G1/8"-M	G1/4"-M	M18x1.5-M	71.0	21.0	6.5	10	41	27	13	17	10
FSTI G1/4-AG G1/8-IG 10	G1/8"-F	G1/4"-M	M18x1.5-M	82.5	19.5	12.0	10	41	27	13	17	10
FSTI G1/4-AG G1/8-IG 10 VG	G1/8"-F	G1/4"-M	M18x1.5-M	79.5	19.5	12.0	10	41	27	13	17	10
FSTI G1/4-AG G1/8-AG 25	G1/8"-M	G1/4"-M	M18x1.5-M	101.0	36.0	6.5	10	56	27	13	17	25
FSTI G1/4-AG G1/8-AG 25 VG	G1/8"-M	G1/4"-M	M18x1.5-M	101.0	36.0	6.5	10	56	27	13	17	25
FSTI G1/4-AG G1/8-IG 25	G1/8"-F	G1/4"-M	M18x1.5-M	109.5	34.5	12.0	10	56	27	13	17	25
FSTI G1/4-AG G1/8-IG 25 VG	G1/8"-F	G1/4"-M	M18x1.5-M	109.5	34.5	12.0	10	56	27	13	17	25
FSTI G1/4-AG G1/8-AG 50	G1/8"-M	G1/4"-M	M18x1.5-M	163.0	59.0	6.5	8	91	27	13	17	50
FSTI G1/4-AG G1/8-AG 50 VG	G1/8"-M	G1/4"-M	M18x1.5-M	163.0	59.0	6.5	8	91	27	13	17	50
FSTI G1/4-AG G1/8-IG 50	G1/8"-F	G1/4"-M	M18x1.5-M	173.0	59.0	12.0	8	91	27	13	17	50
FSTI G1/4-AG G1/8-IG 50 VG	G1/8"-F	G1/4"-M	M18x1.5-M	173.0	59.0	12.0	8	91	27	13	17	50



Spring Plungers FSTI

Stroke from 10 mm to 50 mm



Design Data Spring Plungers FSTI

Type	G1	G2	G3	H [mm]	H2 [mm]	LG1 [mm]	LG2 [mm]	LG3 [mm]	SW1 [mm]	SW2 [mm]	SW3 [mm]	Z (Stroke) [mm]
FSTI G3/8-AG G1/8-AG 10	G1/8"-M	G3/8"-M	M18x1.5-M	72.0	22.0	6.5	9	41	27	13	19	10
FSTI G3/8-AG G1/8-AG 10 VG	G1/8"-M	G3/8"-M	M18x1.5-M	72.0	22.0	6.5	9	41	27	13	19	10
FSTI G3/8-AG G1/8-IG 10	G1/8"-F	G3/8"-M	M18x1.5-M	82.5	22.5	12.0	9	41	27	13	19	10
FSTI G3/8-AG G1/8-IG 10 VG	G1/8"-F	G3/8"-M	M18x1.5-M	82.5	22.5	12.0	9	41	27	13	19	10
FSTI G3/8-AG G1/8-AG 25	G1/8"-M	G3/8"-M	M18x1.5-M	102.0	37.0	6.5	9	56	27	13	19	25
FSTI G3/8-AG G1/8-AG 25 VG	G1/8"-M	G3/8"-M	M18x1.5-M	102.0	37.0	6.5	9	56	27	13	19	25
FSTI G3/8-AG G1/8-IG 25	G1/8"-F	G3/8"-M	M18x1.5-M	112.5	37.5	12.0	9	56	27	13	19	25
FSTI G3/8-AG G1/8-IG 25 VG	G1/8"-F	G3/8"-M	M18x1.5-M	112.5	37.5	12.0	9	56	27	13	19	25
FSTI G3/8-AG G1/8-AG 50	G1/8"-M	G3/8"-M	M18x1.5-M	163.0	54.0	6.5	8	91	27	13	19	50
FSTI G3/8-AG G1/8-AG 50 VG	G1/8"-M	G3/8"-M	M18x1.5-M	163.0	54.0	6.5	8	91	27	13	19	50
FSTI G3/8-AG G1/8-IG 50	G1/8"-F	G3/8"-M	M18x1.5-M	173.0	54.0	12.0	8	91	27	13	19	50
FSTI G3/8-AG G1/8-IG 50 VG	G1/8"-F	G3/8"-M	M18x1.5-M	173.0	54.0	12.0	8	91	27	13	19	50

Schmalz –
The CompanyVacuum
Suction CupsSpecial
GrippersGripping
SystemsClamping
SystemsMounting
ElementsVacuum
GeneratorsValve
TechnologySwitches and
MonitoringFilters and
Connections

Services

Contact

Glossary

Index of
Products