


Vacuum Centers VZ

Suction rate from 4 m³/h to 165 m³/h



Suitability for Industry Specific Applications

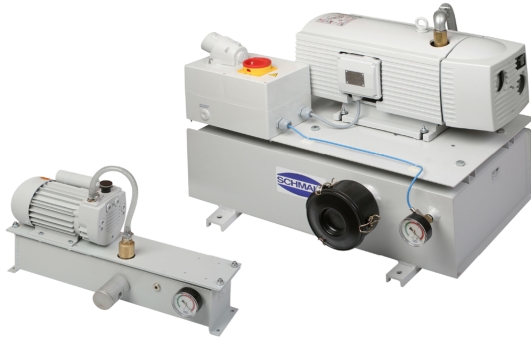

Applications

- Vacuum center for use wherever there is a demand for high performance, safety and reliability

Vacuum Centers VZ

Design

- Vacuum center, consisting of vacuum pump, vacuum reservoir, safety non-return valve, filter and manometer
- Motor protection switch and vacuum regulated motor switch (adjustable) available as options
- Coating RAL 7035

Product Highlights

- Complete solution with pump, reservoir, manometer, filter and control (optional)
- Dry-running pump or oil-lubricated version for vibration-free operation and continuous output
- Vacuum reservoir secures workpiece in case of leakage or power failure
- Automatic energy saving function (optional) enables cost-saving continuous operation

Designation Code Vacuum Centers VZ

| | | | | | | | | | | |
|----|---|----|---|----|---|-----|---|----|---|-----|
| VZ | - | TR | - | 40 | - | AC3 | - | 50 | - | GMS |
| 1 | | 2 | | 3 | | 4 | | 5 | | 6 |

1 – Abbreviated designation

| Code | Version |
|------|---------|
| VZ | VZ |

2 – Pump type

| Code | Type |
|------|----------------|
| OG | Oil-lubricated |
| TR | Dry-running |

3 – Performance class

| Code | Suction rate in m ³ /h |
|---------|-----------------------------------|
| 4...165 | 4 to 165 |

4 – Supply voltage

| Code | Type |
|------|--------------|
| AC | Single-phase |
| AC3 | Three-phase |

5 – Reservoir volume

| Code | Volume in l |
|---------|-------------|
| 5...200 | 5 to 200 |

6 – Product addition

| Code | Type |
|------|--|
| MS | Motor protection switch |
| GMS | Vacuum regulated motor protection switch |

Vacuum centre VZ is delivered as a ready to connect product.

Available spare parts: replacement cartridge for air cleaner, replacement cartridge for oil filter

Vacuum Centers



Vacuum Centers VZ

Suction rate from 4 m³/h to 165 m³/h

Available accessories: filter cartridge for vacuum reservoir