

Vacuum and Pressure Switches VS-V/P-AH/AV-T

Measuring range from -1 bar to 0 bar



Suitability for industry specific applications



Vacuum and Pressure Switches VS-V/P-AH/AV-T

Application

- Vacuum and pressure switches for electronic process monitoring, optimization of cycle times and energy saving devices
- Can be used as a measuring and switching element
- Suitable vacuum switch for use in very dynamic handling systems

Design

- Plastic housing in slim design
- Adapter plate for quick mounting, either vertically or horizontally
- Teach button integrated into the cover
- Transparent cover for LED display
- Power and control connections via 4-pole M8 plug
- Optionally with vacuum / pressure connection M5 or push-in tube 6 mm


Product highlights

- Electronic vacuum and pressure switch enables precise switching and repetitions
- Two digital switching outputs save further switching elements
- Easy-to-read, two-color LED status display
- Can be mounted vertically or horizontally for space-saving installation
- Switching points in the process adjustable with teach button

Designation code Vacuum and Pressure Switches VS-V/P-AH/AV-T

Vacuum and Pressure Switches VS-V/P-AH/AV-T

Measuring range from -1 bar to 0 bar

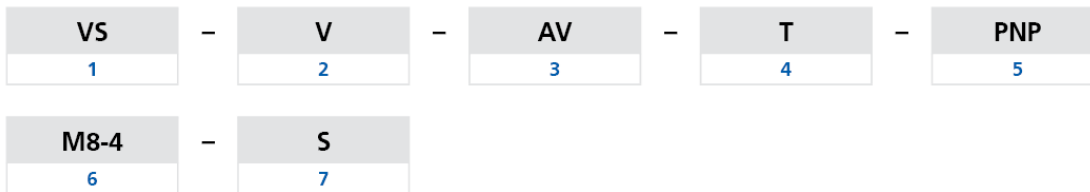

1 – Abbreviated designation

Code	Version
VS	VS

2 – Measuring range

Code	Measuring range in bar
V	-1 to 0
P10	0 to 10

3 – Connection

Code	Connection
AH	Horizontal
AV	Vertical

4 – Switching point

Code	Switching point adjustment
T	Teach button

5 – Switching function

Code	Type
PNP	Switches to plus

6 – Connection electrical

Code	Connection
M8-4	Male connect M8, 4-pole

7 – Product addition

Code	Type
S	Hysteresis fixed

Vacuum and pressure switch VS-V/P-AH/AV-T is delivered as a ready-to-connect product (without connection cable).

Available accessories: connection cable, connection adapter

Ordering data Vacuum and Pressure Switches VS-V/P-AH/AV-T

Type	Part no.
VS-V-AH-T-PNP M8-4	10.06.02.00295
VS-V-AH-T-PNP M8-4 S	10.06.02.00294
VS-V-AV-T-PNP M8-4	10.06.02.00293
VS-V-AV-T-PNP M8-4 S	10.06.02.00292

Ordering data Accessories Vacuum and Pressure Switches VS-V/P-AH/AV-T

Type	Part no.
Connection cable, M8 4-pole, 5 m, PUR, 90°	ASK WB-M8-4 5000 K-4P 10.06.02.00032
Connection cable, M8 4-pole, 5 m, PUR, straight	ASK B-M8-4 5000 K-4P 10.06.02.00031
Connection adapter screw thread M5-AG	ADAP-VS M5-AG-1.3x16 10.06.02.00299
Connection adapter plug-in tube STR6	ADAP-VS 6-1.3x16 10.06.02.00300

Vacuum and Pressure Switches VS-V/P-AH/AV-T

Measuring range from -1 bar to 0 bar

Technical data Vacuum and Pressure Switches VS-V/P-AH/AV-T


Type	Measured medium	Measuring range [bar]	Max. overpressure safety [bar]	Repeatability	Hysteresis	Inputs / outputs
VS-V-AH-T-PNP M8-4	Non-aggressive gases; dry, oil-free air	-1,0 ... 0,0 bar	5	± 1% of full-scale value	Adjustable	2 digital
VS-V-AH-T-PNP M8-4 S	Non-aggressive gases; dry, oil-free air	-1,0 ... 0,0 bar	5	± 1% of full-scale value	Fixed: approx. 20 mbar	2 digital
VS-V-AV-T-PNP M8-4	Non-aggressive gases; dry, oil-free air	-1,0 ... 0,0 bar	5	± 1% of full-scale value	Adjustable	2 digital
VS-V-AV-T-PNP M8-4 S	Non-aggressive gases; dry, oil-free air	-1,0 ... 0,0 bar	5	± 1% of full-scale value	Fixed: approx. 20 mbar	2 digital

Type	Switching capacity max. [mA]	Indication	Electrical connection	Voltage	Current consumption [mA]	Protection type IP	Operating temperature [°C]	Temperature influence	Weight [g]
VS-V-AH-T-PNP M8-4	200	LED	Male connect M8, 4 pole	10-30V DC	20	IP 40	0 ... 60 °C	± 3% of full-scale value	6
VS-V-AH-T-PNP M8-4 S	200	LED	Male connect M8, 4 pole	10-30V DC	20	IP 40	0 ... 60 °C	± 3% of full-scale value	6
VS-V-AV-T-PNP M8-4	200	LED	Male connect M8, 4 pole	10-30V DC	20	IP 40	0 ... 60 °C	± 3% of full-scale value	6
VS-V-AV-T-PNP M8-4 S	200	LED	Male connect M8, 4 pole	10-30V DC	20	IP 40	0 ... 60 °C	± 3% of full-scale value	6

Vacuum and Pressure Switches VS-V/P-AH/AV-T

Measuring range from -1 bar to 0 bar

Design data Vacuum and Pressure Switches VS-V/P-AH/AV-T

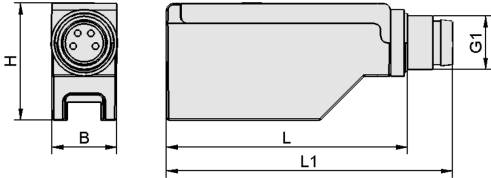

VS-V, VS-P10

Vacuum and Pressure Switches VS-V/P-AH/AV-T

Measuring range from -1 bar to 0 bar

Design data Vacuum and Pressure Switches VS-V/P-AH/AV-T

Type	B [mm]	G1	H [mm]	L [mm]	L1 [mm]
VS-V-AH-T-PNP M8-4	10	M8-M	17.5	36.2	43.0
VS-V-AH-T-PNP M8-4 S	10	M8-M	17.5	36.2	43.0
VS-V-AV-T-PNP M8-4	10	M8-M	16.4	41.2	48.0
VS-V-AV-T-PNP M8-4 S	10	M8-M	16.4	41.2	48.0